




ELITE GLASS WALL SOLUTIONS



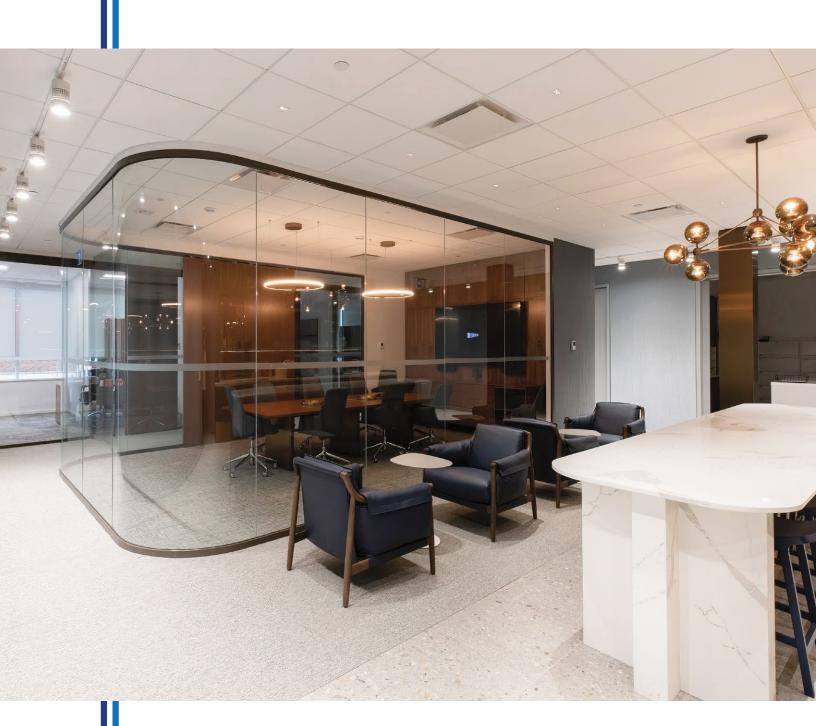

Our Elite Glass Wall Solutions optimize the power of natural light, acoustical performance and most importantly, people. Elite Glass Walls include single glass, double glass and curved wall solutions.


Our interchangeable product lines offer customizable applications that radically transform space management, providing endless possibilities.





Elite Glass Wall Solutions easily integrate with your space. They can be paired with our Door Solutions, offering a variety of compatible hardware options and design, simplifying the specification process.

Elite Glass Wall Solutions also provide efficiencies that reduce consumption. All items are locally sourced, made from 100% recyclable materials and uphold our on-going commitment to reduce climate change.

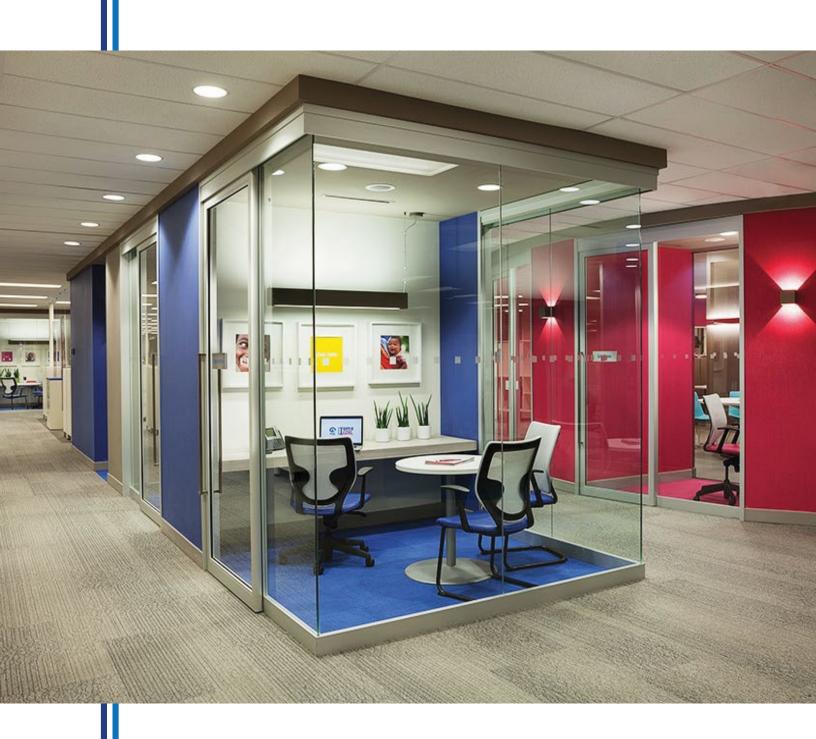

SINGLE GLASS WALL



Single glass walls are a dependable choice that can easily adjust to a variety of construction conditions. Elements are easily interchangeable, radically transforming and improving how spaces are designed to meet schedule. A key design element in any space, PC350 glazed walls provide privacy while allowing uninterrupted lines of sight and access to natural light.








- · Profiles are designed to work with both unfinished and finished wall configurations

- Maximum panel height: 12' (3658mm)
 Field adaptable to allow flexibility for onsite conditions
 Effortlessly integrates with all swing and sliding door options

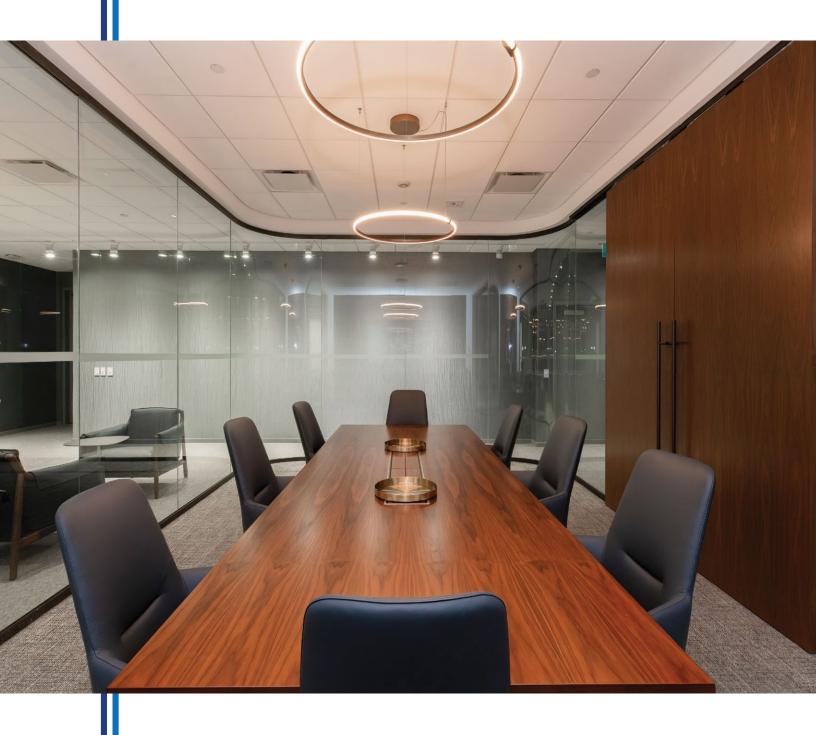





- Choose from traditional profiles up to 4" (102mm), or minimal profiles of 2" (51mm)
- Glazing compatibilities include 1/4" (6mm), 3/8" (10mm) and 1/2" (12mm)
 Glazing types include clear tempered, laminated, low iron, acid etch and LCD privacy glass
- · Profiles are available for both standard straight line or curved configurations



DOUBLE GLASS WALLS



PC350 Double Glazed Walls provide a level of privacy and sound quality. Double glazing is the best option for STC requirements where open sight lines are maintained without compromise to design.





BENEFITS

- · Profiles are designed to work with both unfinished and finished wall configurations

 Maximum panel height: 12' (3658mm)

 Minimum STC rating of 35

 Field adaptable to allow flexibility for onsite conditions

 Effortlessly integrates with all swing and sliding traditional barn door options







- Choose from traditional profiles up to 4" (102mm), or minimal profiles of 2" (51mm)
- Glazing compatibilities include 1/4" (6mm), 3/8" (10mm) and 1/2" (12mm)
 Glazing types include clear tempered, laminated, low iron, acid etch and LCD privacy glass
- · Profiles are available for both standard straight line or curved configurations